

P287-13648

ADDENDUM NUMBER 1

GREENFIELD PARK  
GOLF COURSE IRRIGATION PUMP STATION  
Site # 766694  
12035 West Greenfield Avenue  
West Allis, WI

Project Number: P287-13648

Notice Number: 6918

Date of Addendum: May 8, 2014

This Addendum to the Contract Documents is issued to modify, explain or correct the original documents, dated April 11, 2014, and is hereby made part of the Contract Documents. Acknowledge receipt of this Addendum in the space provided on the Bid Form, or bid may be rejected.

BIDDING DOCUMENTS

Document 02810-Prefabricated Pump Station

1. Change pump station model number in 1.1 E to HCBVE-1-50x2-3vc-460-3-1000-70.
2. Change 2.17 title "Junction Bokes" to "Junction Boxes"

Document 220600 – Pipe and Pipe Fittings

1. Contractor shall coordinate with the City of West Allis to replace the existing water meter as required on the drawings. City cost, if any, for changing the meter will be paid from the Miscellaneous Allowance included in the bid price. Payment will be based on actual cost as shown on a receipt from the City indicating paid in full.
2. ADD paragraph 2.1 F to read: Ductile iron pipe and fittings: Class 53 minimum wall thickness, cement lined (1/16 inch), bell and spigot, AWWA C151/A21.51 with mechanical joints AWWA C110. Elastomeric seal joints, AWWA C111.
3. REVISE material in paragraph 3.5 B to read: PVC below grade, ductile iron above grade.

Document 221000 Valves

1. DELETE paragraph 2.1 F.

Construction Drawings

Plans Sheet P100


Attached is a revised pump station connection detail. Changes are as follows:

- Change main water shut off valve from 6-inch to 8-inch.
- Change 8-inch riser pipe from PVC to ductile iron.
- Change riser pipe tee to ductile iron
- Change 6-inch pipe to pump station to ductile iron

End of Addendum No. 1

ADDENDUM NUMBER 1

PROJECT NUMBER P287-13648

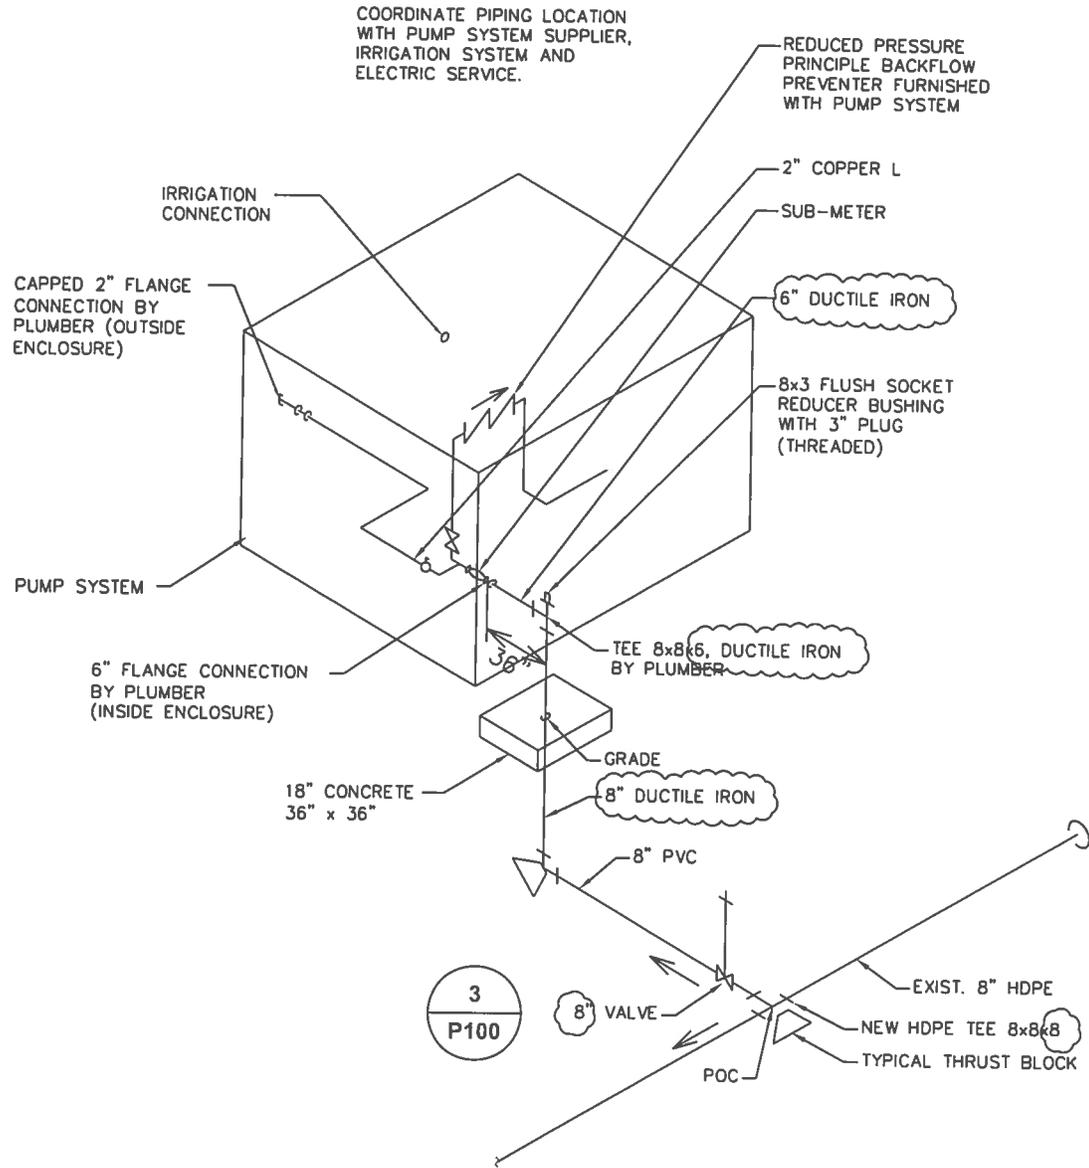

5

PUMP STATION CONNECTION DETAIL

SCALE: NONE

REVISED 5-8-14

GREENFIELD PARK IRRIGATION PUMP STATION