BID PACKAGE #2-REBID & BID PACKAGE #3: ADDENDUM NUMBER 2

MILWAUKEE COUNTY CENTRAL FLEET MAINTENANCE BUILDING MODIFICATION: OFFICE ADDITION AND RENOVATION: BID PACKAGE #2-REBID& BID PACKAGE #3 Site #365, Bldg. #5600 10320 W. Watertown Plank Rd. Wauwatosa, Wisconsin 53226

Project Number: O230-13636

Date of Addendum: May 21, 2014

This Addendum to the Contract Documents is issued to modify, explain or correct the original documents, dated May 2, 2014, and is hereby made part of the Contract Documents.

MODIFICATIONS & CLARIFICATIONS TO SPECIFICATIONS

- 1. Project Manual Volume 2: Bid Package #2-Rebid:
 - a. Specification Section 07 54 23 Thermoplastic Polyolefin (TPO) Roofing: page 075423-4, part 2.1 MANUFACTURERS, A, 5, **REVISE** specification as follows,
 - "5. Versico"
 - Specification Section 08 41 13 Aluminum Framed Entrances and Storefronts: page 084113-3, part 1.9 WARRANTY, B, 2, REVISE specification as follows,
 - "2. Warranty Period: 15 Years from date of substantial completion"
 - c. Specification Section 08 41 13 Aluminum Framed Entrances and Storefronts: page 084113-11, part 2.9 ALUMINUM FINISHES, A, **REVISE** specification as follows,
 - "A. High-Performance Organic Finish: Three-coat fluoropolymer with suspended metallic flakes finish complying with AAMA 2604 and containing not less than 50 percent PVDF or FEVE resin by weight in both color coat and clear topcoat. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions."
- 2. Project Manual Volume 3: Bid Package #3:
 - a. Specification Section 09 67 10 Epoxy Resinous Flooring: page 09671-1, part 1.2 SUMMARY, A, 1, REVISE specification as follows,
 - "A. This section includes resinous flooring with epoxy body coat(s)."
 - b. Specification Section 09 67 10 Epoxy Resinous Flooring: page 09671-3, part 2.1 RESINOUS FLOORING (EPOXY: ERF), B, 4, **REVISE** specification as follows,
 - "4. Overall System Thickness: 12 mils."
 - c. Specification Section 09 67 10 Epoxy Resinous Flooring: page 09671-3, part 2.1 RESINOUS FLOORING (EPOXY: ERF), C, 1, **REVISE** specification as follows,
 - "d. Thickness: 8 mils"


d. Specification Section 09 67 10 Epoxy Resinous Flooring: page 09671-3, part 2.1 RESINOUS FLOORING (EPOXY: ERF), C, 2, **REVISE** specification as follows,

"g. Thickness: 4 mils"

MODIFICATIONS & CLARIFICATIONS TO DRAWINGS

- 1. Drawings: Bid Package #3:
 - a. Drawing Sheet P101 dated 5/2/14: **REVISE** sheet per addendum drawing ADP-4 (Drawings attached).
 - b. Drawing Sheet P102 dated 5/2/14: **REVISE** sheet per addendum drawing ADP-3 (Drawings attached).
 - c. Drawing Sheet P202 dated 5/2/14: **REVISE** sheet per addendum drawing ADP-2 (Drawings attached).
 - d. Drawing Sheet P302 dated 5/2/14: **REVISE** sheet per addendum drawing ADP-1 (Drawings attached).

End of Addendum No. 2

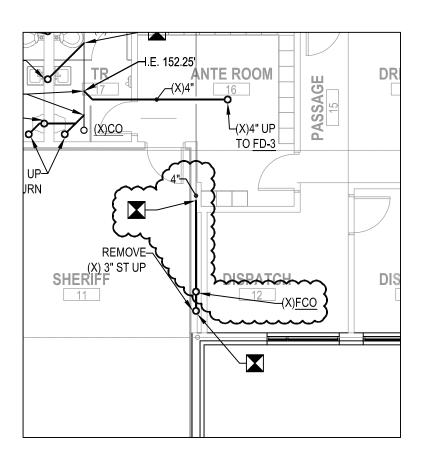




PROJECT NUMBER: 2013-0166
DATE: 2014-05-16
SCALE: 1/8" = 1'-0"
REFERENCE SHEET: P101

PROJECT TITLE: CENTRAL FLEET

SHEET TITLE: MAINTENANCE BUILDING DEMO BELOW FLOOR STORM UPDATE

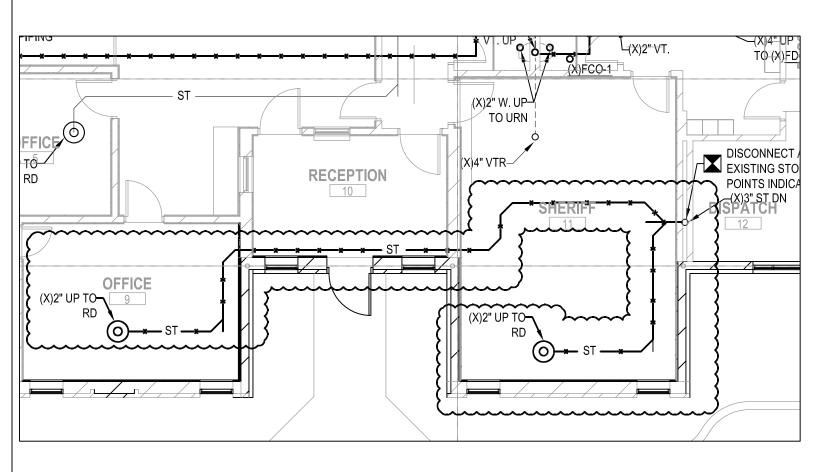




PROJECT NUMBER: 2013-0166 DATE: 2014-05-16 SCALE: 1/8" = 1'-0"

REFERENCE SHEET: P102

PROJECT TITLE: CENTRAL FLEET

SHEET TITLE: MAINTENANCE BUILDING STORM DEMO ABOVE FLOOR UPDATE

ADP-3

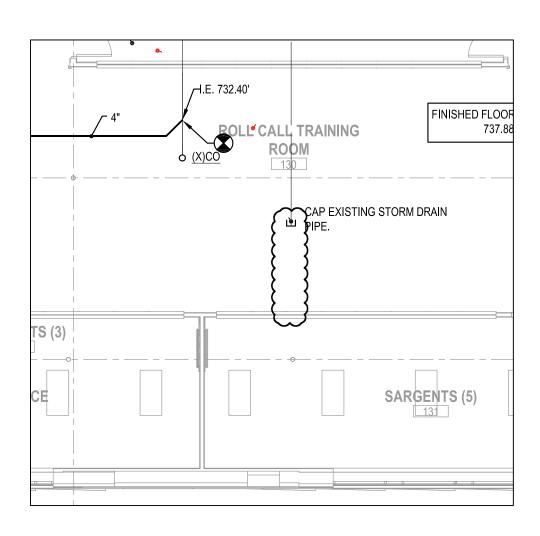




PROJECT NUMBER: 2013-0166
DATE: 2014-05-16
SCALE: 1/8" = 1'-0"
REFERENCE SHEET: P202

PROJECT TITLE: CENTRAL FLEET
MAINTENANCE B
SHEET TITLE: STORM NEW

MAINTENANCE BUILDING STORM NEW CONSTRUCTION BELOW FLOOR UPDATE

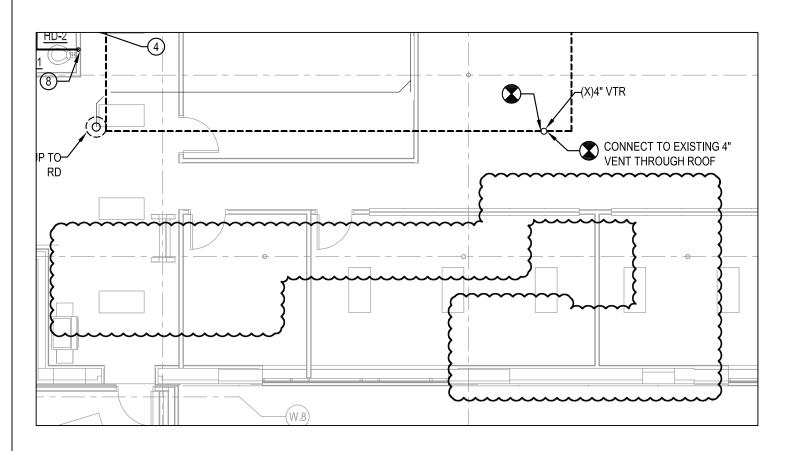



PROJECT NUMBER: 2013-0166
DATE: 2014-05-16
SCALE: 1/8" = 1'-0"
REFERENCE SHEET: P302

PROJECT TITLE: CENTRAL FLEET

SHEET TITLE: MAINTENANCE BUILDING STORM NEW CONSTRUCTION

ABOVE FLOOR UPDATE

ADP-1