

Z083-11631

ADDENDUM NUMBER 1

MILWAUKEE COUNTY
ZOOLOGICAL GARDENS
PARKING LOT 1 AND WALKWAYS
RE-PAVING & LIGHTING
10001 West Blue Mound Road
Site #355
Milwaukee, WI 53226

Project Number: Z083-11631
Notice Number: 6872

Date of Addendum: December 5, 2013

This Addendum to the Contract Documents is issued to modify, explain or correct the original documents, dated September 12, 2013, and is hereby made part of the Contract Documents. Acknowledge receipt of this Addendum in the space provided on the Bid Form, or bid may be rejected.

DRAWINGS

DRAWING REVISIONS:

- 1) Sheet 113 - Lighting Fixture Schedule: Replace schedule with new schedule shown in SKT 001 attached to this addendum.

Sheet 113 – Revisions to notes:

- 2) F1: Change note to read: EXITING FEED WITH (2) 120 V CKTS TO REMAIN AND TO POWER NEW FIXTURES AND POLE MOUNT RECEPTACLES.
- 3) F3: Change note to read: NEW FEED, FROM 6 EXISTING AND 2 NEW 120V CKTS ON EXISTING PANEL IN FLAMINGO CAFÉ BUILDING BASEMENT TO GROUND JUNCTION BOX J1, 2" UG PVC CONDUIT. PROVIDE 6 GFI CKT BREAKERS.
- 4) F4: Change note to read: NEW FEED, WITH (2) 120 CKTS FROM GROUND JUNCTION BOX J1 TO GROUND JUNCTION BOX J2, 2" UG PVC CONDUIT, 1 CKT SHALL BE ON GFI BREAKER. SEE SHEET 114
- 5) F5: Change note to read: NEW FEED, WITH (3) 120 CKTS FROM GROUND JUNCTION BOX J1 TO NORTH WALKWAY LIGHT POLES, 2" UG PVC CONDUIT, 1 CKT SHALL FEED LIGHTS ON BOTH SIDE OF WALKWAY; EACH SIDE OF WALKWAY SHALL HAVE 1 ADDITIONAL STAND ALONE CKTS ON GFI BREAKER.
- 6) F6: Change note to read: NEW FEED, WITH (3) 120 CKTS FROM GROUND JUNCTION BOX J1 TO SOUTH WALKWAY LIGHT POLES, 2" UG PVC CONDUIT, 1 CKT SHALL FEED LIGHTS ON BOTH SIDE OF WALKWAY; EACH SIDE OF WALKWAY SHALL HAVE 1 ADDITIONAL STAND ALONE CKTS ON GFI BREAKER.
- 7) F7: Change note to read: NEW FEED, WITH (2) 120 CKTS FROM GROUND JUNCTION BOX J1 TO PARKING LOT LIGHT POLES, 2" UG PVC CONDUIT, SEE NOTE F4.
- 8) F8: Change note to read: NEW FEED, EXTENSION OF F6, ALT BID, DEE SHEET 115.

Z083-11631

Sheet 114 – Revisions to Plan:

9) Add note as shown in SKT 002 to identify concrete border at permeable pavers.


Sheet 114 – Revisions to notes:

10) F3: Change note to read: DITTO NOTE F3 ON SHEET 113.

11) F4: Change note to read: DITTO NOTE F4 ON SHEET 113.

12) F7: Change note to read: DITTO NOTE F7 ON SHEET 113.

End of Addendum No. 1

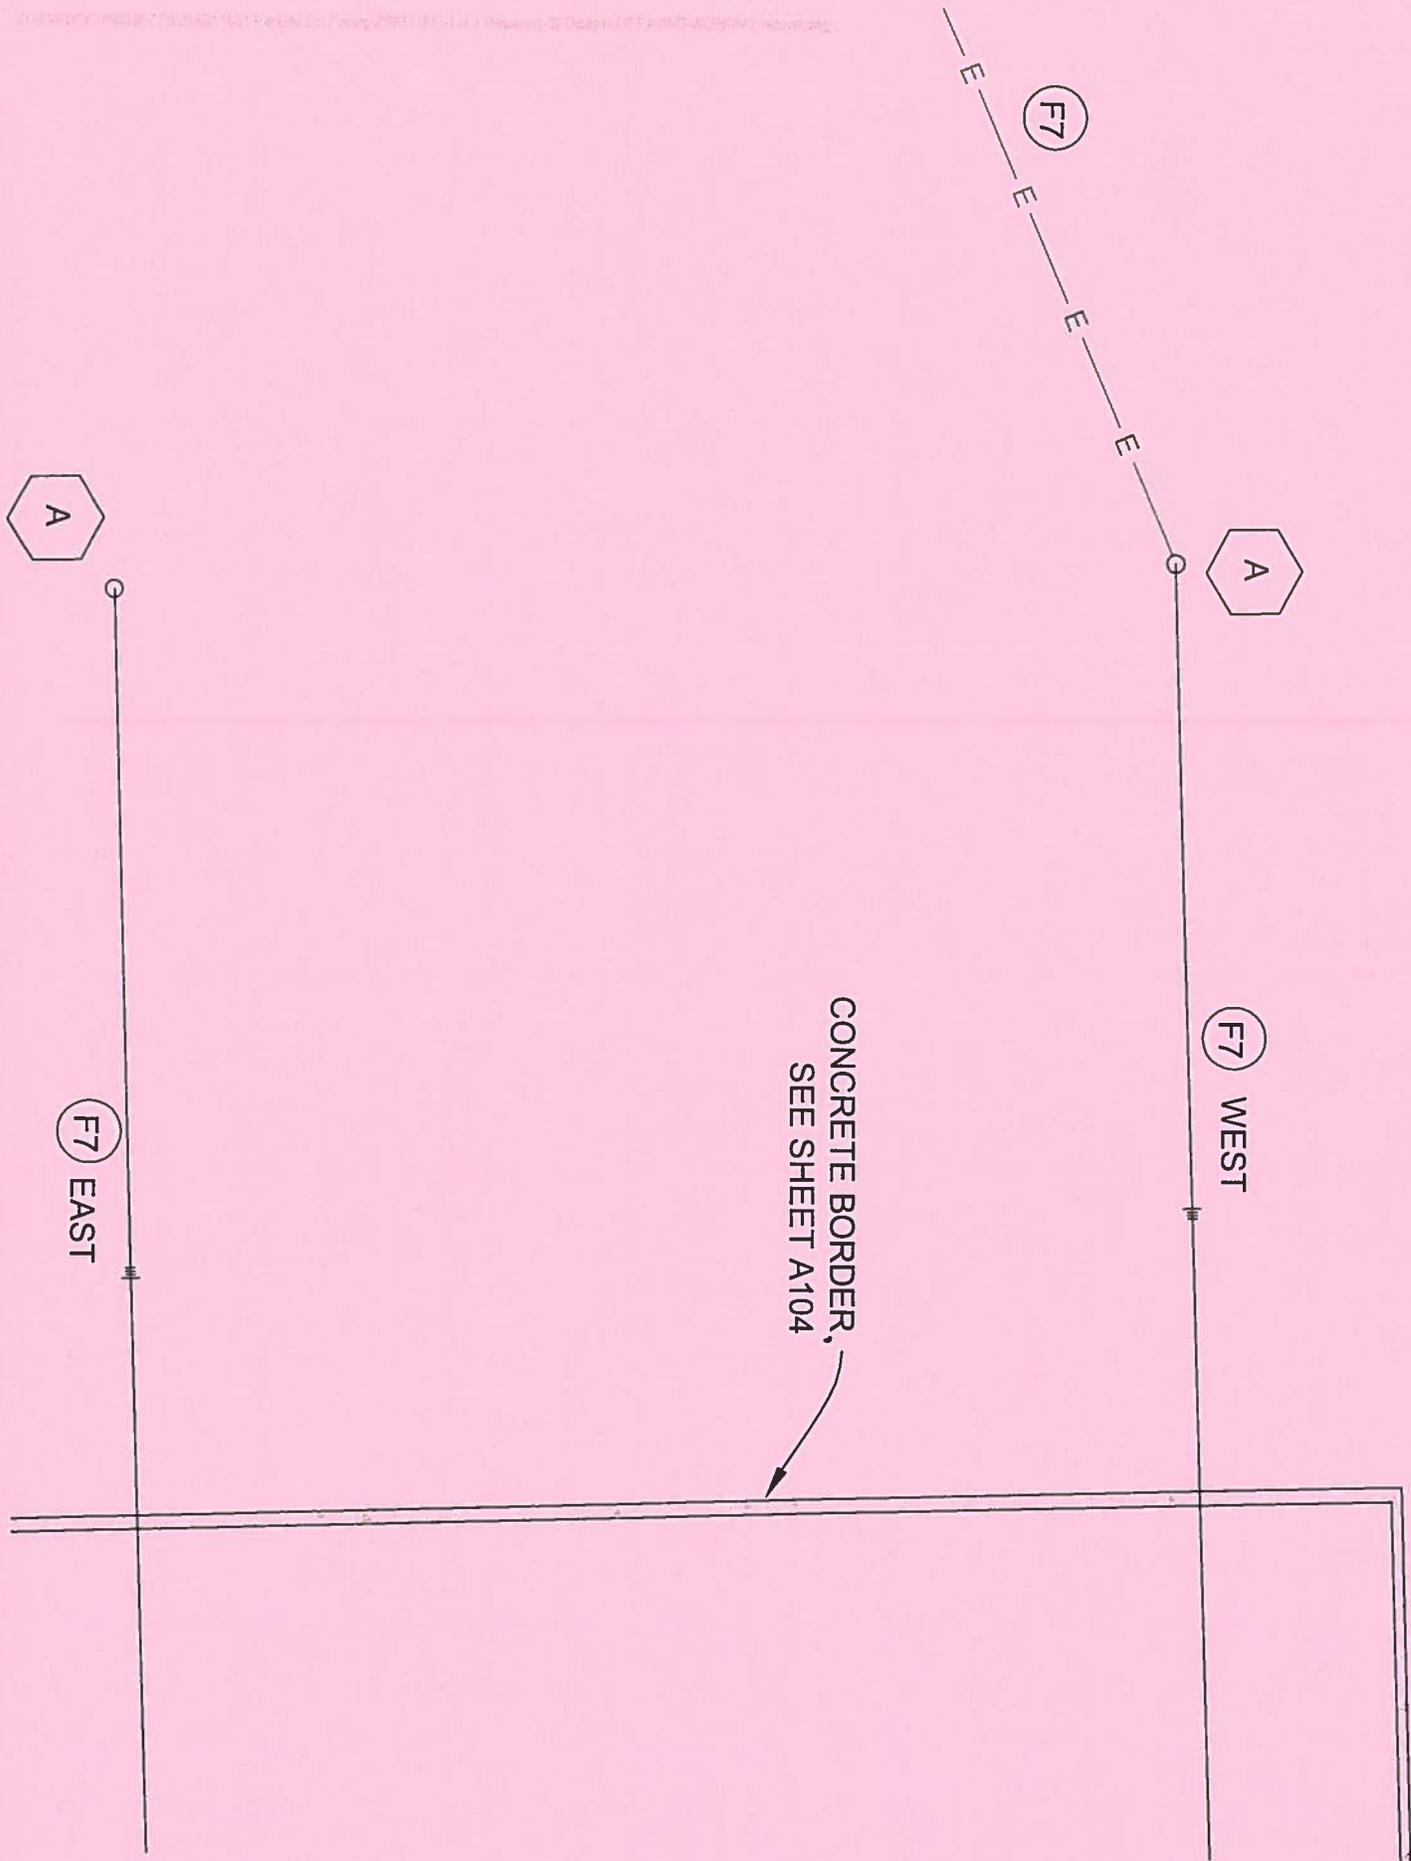

SKT002

00/000/2013
P:\A\132
A0100100000

Milwaukee County Dept. of Administrative Services
FACILITIES MANAGEMENT DIVISION
Architectural, Engineering & Environmental Services
CITY CAMPUS 2711 W WELLS ST, 2ND FLOOR MILWAUKEE, WI 53208



Zoo Parking Lot No. 1 & Walkways Repaving
MILWAUKEE COUNTY ZOO
10001 W Bluemound Rd. Milwaukee, WI 53226

LIGHTING FIXTURE SCHEDULE (SEE NOTES ALSO)

DES.	DESCRIPTION	LAMP DATA		VOLT	LENS DEPTH	LIGHTING FIXTURE		CONTROLS	ON POLE REC	
		QNTY	TYPE			MFR.	CAT. NO.		NO.	VOLTAGE
A	Circular Post Top LED Area Light Type 5 - 27' Pole	1	204W LED	120, 1Ø	0	BETA	FIXTURE: ARE-EDR-5M-D-12-UL-BK-525 POLE: PS5R27C-(0)-(BK)	EXISTING TIMER, PHOTOCELL	1	120 ON GFI CKT
B1	Dual Pendant LED Area Light Type 5 - 16' Pole	2	204W LED	120, 1Ø	0	BETA	FIXTURE: K823-FAFL-IV-165 (SSL)-16000-120-BK POLE: KAS8-SFE-16 ARM: KA13-T-2	EXISTING TIMER, PHOTOCELL	1	120 ON GFI CKT
B2	MATCH TYPE B1							EXISTING TIMER, PHOTOCELL	1	120 ON GFI CKT
E	Existing, See Note							EXISTING TIMER, PHOTOCELL	1	120 ON GFI CKT

