

Z083-11631

ADDENDUM NUMBER 3

MILWAUKEE COUNTY
ZOOLOGICAL GARDENS
PARKING LOT 1 AND WALKWAYS
RE-PAVING & LIGHTING
10001 West Blue Mound Road
Site #355
Milwaukee, WI 53226

Project Number: Z083-11631
Notice Number: 6872

Date of Addendum: December 9, 2013

This Addendum to the Contract Documents is issued to modify, explain or correct the original documents, dated September 12, 2013, and is hereby made part of the Contract Documents. Acknowledge receipt of this Addendum in the space provided on the Bid Form, or bid may be rejected.

REVISIONS TO DRAWINGS AND ADDENDUM 1 & 2

Sheet 102:

- 1) Add note at east to west contour on north portion of the lot as follows:
"EL. 770, BENCH MARK UNKNOWN"
- 2) Add note at east to west contour on Mid portion of the lot as follows:
"EL. 768, BENCH MARK UNKNOWN"
- 3) Add note at east to west contour on South portion of the lot as follows:
"EL. 766, BENCH MARK UNKNOWN"

Sheet 103:

- 4) At ZONE 6: Add note key #3:
- 5) At ZONE 7: Add note key #3:
- 6) Note 2 – Change note to read as follows:
"REMOVE ASPHALT AND SUBGRADE TO A DEPTH, AT THE WEST CONCRETE CURB, REQUIRED TO RECEIVE 8" #2 STONE, 6# 1 STONE, 1-1/2" 3/8" STONE & PERMEABLE PAVERS; DEPTH AT THE EAST END SHALL BE GREATER WITH SURFACE OF ENTIRE EXCAVATED AREA AT SAME ELEVATION, EXCEPT AT UNDERDRAIN TRENCH WHERE IT SHALL BE LOWER, AND AT EDGE WHERE IT SHALL BE TAPERED, SEE APPLICABLE DETAILS."
- 7) Note 6 – Change the depth of gravel bed below unit pavers to 7":

Sheet 104:

- 8) Note #5 – Add statement as follows:
"WHERE REQUIRED, OVER EXCAVATED TO A STABLE STRATA AND PROVIDE NEW GRAVEL BED IN DEPTH AS REQUIRED AT A UNIT PRICE OF \$28/TON TO BE DRAWN FROM THE ALLOWANCE, SAID UNIT PRICE SHALL APPLY TO REDUCTION OF EXCAVATION AND GRAVEL BED DEPTH WHERE APPLICABLE."

Sheet 109:

- 9) Detail 6/109 – Add note as follows:
"PROVIDE LANDSCAPE FABRIC BELOW #2 STONE BED AT VERTICAL AND TAPERED EXCAVATION EDGES."

Sheet 110:

- 10) Detail 3/110 – Add note: "EVERY CONCRETE SECTION OF APPROX. 8'X8' TO 9'X9', OR AS PER PLAN SHALL BE REINFORCED AS SHOWN, AND BE SEPARATED FROM

ADJACENT SECTIONS OR AREAS BY CONTROL JOINTS OR CONSTRUCTION JOINTS; MULTIPLE SECTION TOTALING AN AREA OF NOT GREATER THAN 30'X30' MAY BE POURED AT THE SAME TIME, THE COMBINED AREA SHALL BE JOINED TO ADJACENT AREAS WITH CONSTRUCTION JOINTS SHOWN IN APPLICABLE DETAIL(S)..

- 11) Detail 8/110 – Add note: "AT ALL UNIT PAVER AREAS ALONG WALKWAY, SLOPE OR LEVEL, PROVIDE LANDSCAPE FABRIC BELOW GRAVEL BED."

Sheet 111:


- 12) Detail 4/111 – Add note on backside of curb to read "EXPANSION JOINT FILLER AND SEALANT."
- 13) Detail 5/111 – Add note on backside of curb to read "EXPANSION JOINT FILLER AND SEALANT."
- 14) Detail 5/111 – Change 12" height on gutter side to 7".
- 15) Detail 6/111 – Add note on backside of curb to read "EXPANSION JOINT FILLER AND SEALANT."
- 16) Detail 7/111 – Replace drawing with SKT003 dated 12/09/2013 attached to this Addendum 3.

Revisions to Addendum No. 2

Pertaining to Drawing Sheet 113 – Revisions to notes:

- 17) F3: Replace entire note issued in addendum no. 2 with the following:
"NEW FEED, XHHW WIRES IN (1) 3" UG HDPE CONDUITS FROM 6 EXISTING AND 2 NEW CKTS ON EXISTING PANEL IN FLAMINGO CAFÉ BUILDING BASEMENT TO GROUND JUNCTION BOX J1, TO PROVIDE (3) 208/240V LIGHTING CKTS AND (5) 120V RECEPTACLES CKTS, PROVIDE GFI BREAKERS PER REVISED NOTES F5, F6 & F7."
- 18) F4: Replace entire note issued in addendum no. 2 with the following:
"NEW FEED, FROM GROUND JUNCTION BOX J1 TO GROUND JUNCTION BOX J2, XHHW WIRES IN 2" HDPE CONDUIT WITH WIRES MATCHING FEED F6."
- 19) F5: Replace entire note issued in addendum no. 2 with the following:
"NEW FEED, FROM GROUND JUNCTION BOX J1 TO NORTH WALKWAY LIGHT POLES, XHHW WIRES IN 1/14" HDPE CONDUIT FOR (1) 208/240V CKT FOR LIGHTS ON BOTH SIDE OF WALKWAY; & (2) 120V CKTS ON GFI BREAKERS FOR RECEPTACLES, (1) CKT FOR EACH SIDE OF WALKWAY; PROVIDE (1) EMPTY CONDUIT STUB AT THE MOST EASTERLY POLE BASE FOR A FUTURE EASTWARD EXTENSION."
- 20) F6: Replace entire note issued in addendum no. 2 with the following:
"NEW FEED, FROM GROUND JUNCTION BOX J2 TO SOUTH WALKWAY LIGHT POLES, XHHW WIRES IN 1/14" HDPE CONDUIT FOR (1) 208/240V CKT FOR LIGHTS ON BOTH SIDE OF WALKWAY; & (2) 120V CKTS ON GFI BREAKERS FOR RECEPTACLES, (1) CKT FOR EACH SIDE OF WALKWAY; PROVIDE (1) EMPTY CONDUIT STUB AT THE MOST EASTERLY POLE BASE FOR A FUTURE EASTWARD EXTENSION."
- 21) F7: Replace entire note issued in addendum no. 2 with the following:
"NEW FEED, FROM GROUND JUNCTION BOX J1 TO PARKING LOT LIGHT POLES, XHHW WIRES IN 1/14" HDPE CONDUIT FOR (1) 208/240V CKT FOR LIGHTS; & (1) 120V CKTS ON GFI BREAKER FOR RECEPTACLES; PROVIDE (1) EMPTY CONDUIT STUB AT EACH NORTH POLE BASE FOR FUTURE NORTHWARD EXTENSIONS, 2 TOTAL."

End of Addendum No. 3

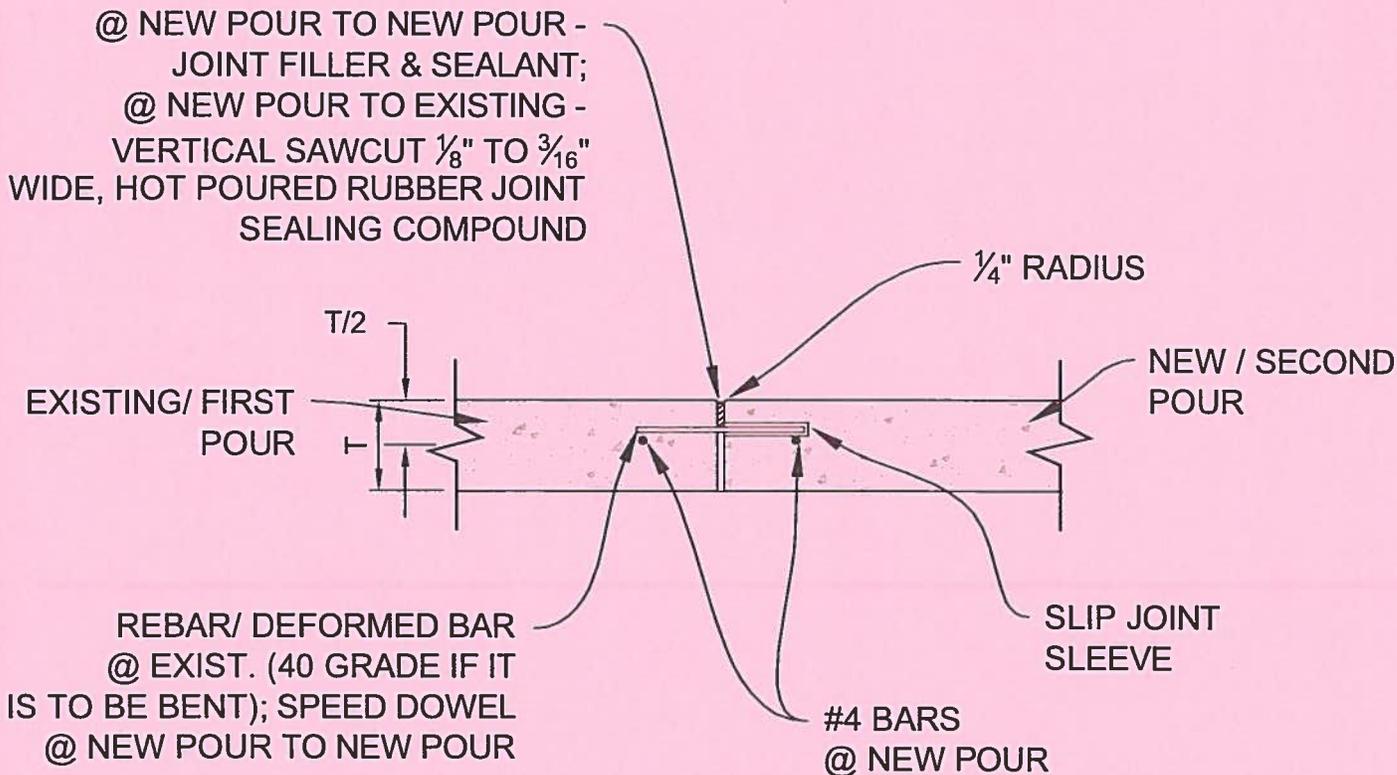

| TIE BAR SIZE | LENGTH | SPACING |
|--------------|--------|---------|
| # 4 | 30" | 18" |

CONC. PAVEMENT CONSTRUCTION JOINT DETAIL (SLIP-JOINT)

NTS

7
111

