

PUBLIC INVOLVEMENT MEETING
S. 76th Street (CTH U) Reconstruction Project
W. South County Line Road to S. Creekview Court
January 23, 2024


Purpose of Meeting

Welcome to the Public Involvement Meeting (PIM) for the S. 76th Street (CTH U) Reconstruction Project. This meeting is being conducted by Milwaukee County in conjunction with the City of Franklin.

The purpose of this meeting is to present the design being considered for this project and the possible impacts to your property. It is also your opportunity to provide input to the design process.

Location

The project is located in the southwestern portion of Milwaukee County on S. 76th Street (CTH U) in the City of Franklin. The project will begin at W. South County Line Road to approximately 500 feet north of S. Creekview Court

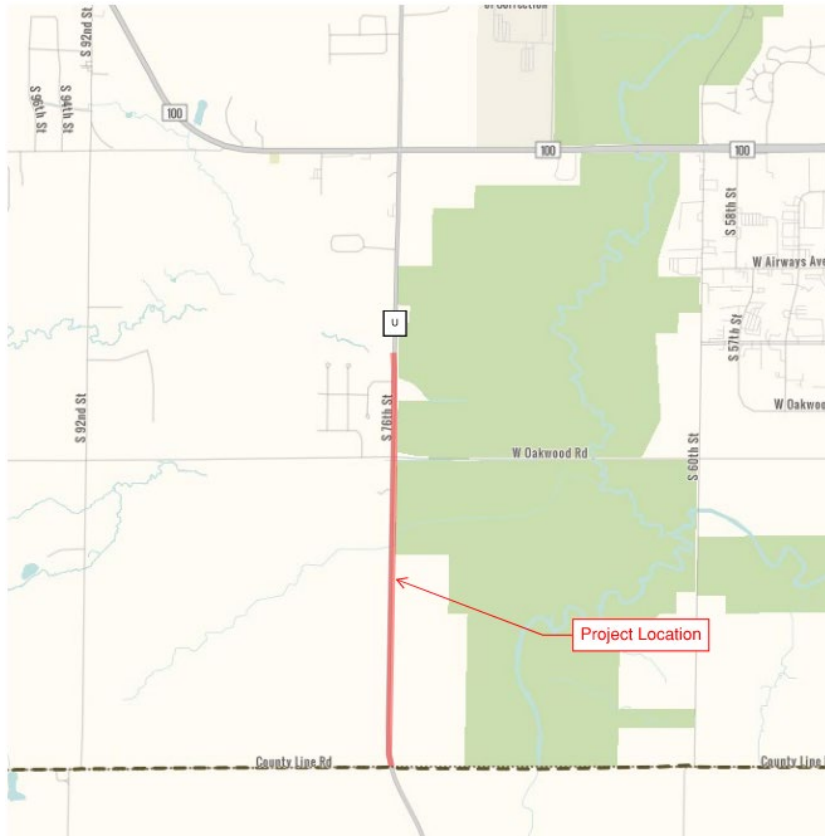

Project Objectives

- 1) Improve Safety
- 2) Replace the Deteriorated Pavement and Repair the Shoulders
- 3) Improve Drainage
- 4) Provide Accommodations for Bicycles

Existing Conditions

S. 76th Street (CTH U) between W. South County Line Road and S. Creekview Court, is a 2-lane undivided rural roadway with gravel shoulders in both directions. The road surface is comprised of a 9-inch concrete pavement an 8-inch sand/gravel base. The roadway surface and shoulders are in poor condition. The land use in the project corridor is a mix of residential and agricultural. The posted speed limit is 50 MPH.

Proposed Action

The proposed reconstruction of S. 76th Street (CTH U) will consist of removing the existing concrete pavement and replacing the pavement with either a concrete or asphalt pavement. The 10-foot-wide gravel shoulders will be replaced with a 5-foot paved shoulder and 3-feet of gravel. The 5-foot paved shoulders will provide on-street bicycle accommodations. The roadway pavement markings and signing will be updated to current standards. Roadway drainage will be improved with ditching and new driveway culverts, cross culverts and culverts under W. South County Line Road and W. Oakwood Road. The existing box culverts located north of S. Creekview Court and south of W. Oakwood Road will be repaired.

Design Parameters

Average Daily Traffic (2023)	6,100 VPD*
Average Daily Traffic (2045)	7,600 VPD*
Directional Split	50%/50% (northbound/southbound)
Truck Percentage	6.6%
Posted Speed Limit	50 miles per hour

*VPD=vehicles per day

Construction

During construction, S. 76th Street (CTH U) will be closed to thru traffic from W. South County Line Road and S. Creekview Court. W. Oakwood Road will remain open during construction. S. 76th Street (CTH U) traffic will be detoured. Access will be maintained to properties/businesses at all times during construction, including emergency vehicles.

Construction is anticipated to begin in the Spring of 2025 and is estimated to be substantially complete in Fall of 2025, weather permitting.

Anticipated Schedule

Final Plans Complete	January 2025
LET Date	February 2025
Construction Begins	Spring 2025